




# RonaDeck

## EcoAgg UV Surfacing

**PATHWAYS** - SuDS Compliant\*

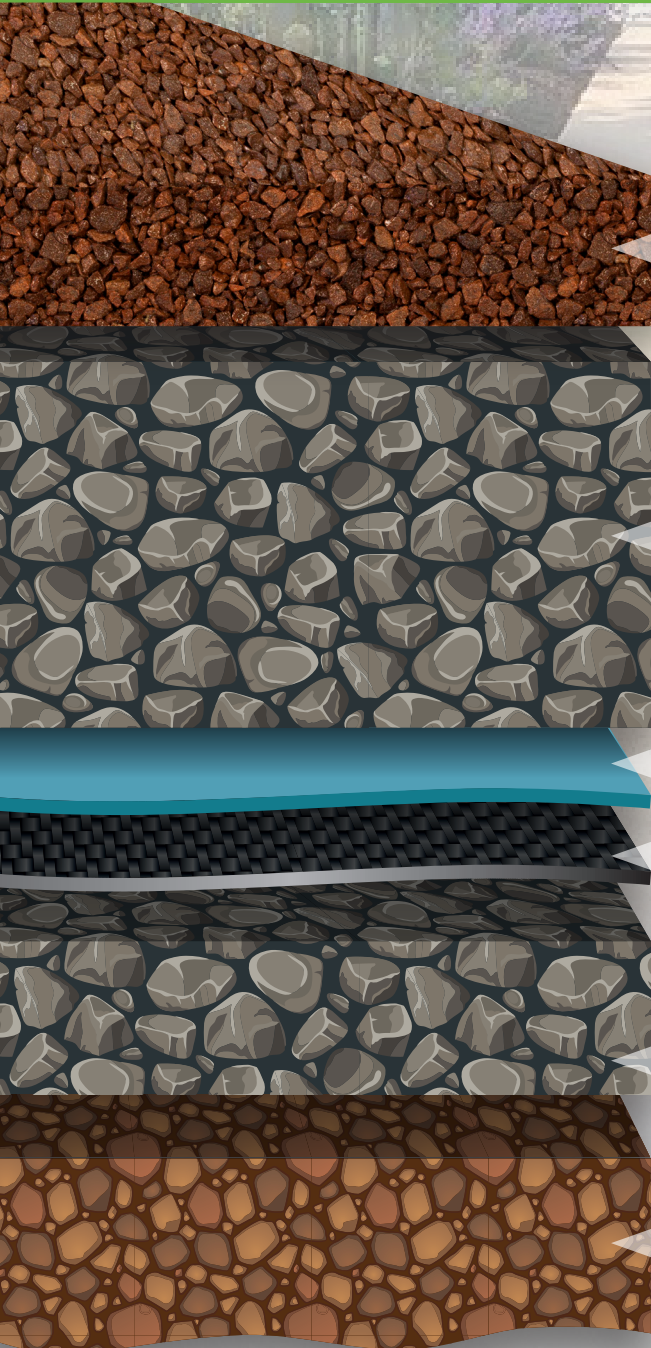

### ECOAGG UV SURFACING

**40mm** minimum depth of RonaDeck EcoAgg UV natural aggregate bound with RonaDeck EcoAgg UV Resin.

### GRANULAR SUB-BASE

**150mm** minimum well compacted Type 3 granular sub-base or similar approved – depth dependent on site drainage conditions.

### IMPERMEABLE MEMBRANE (Optional)

Impermeable membrane to carry water to infiltration/storage system or soakaway when drainage is poor

**OR**

### GEOTEXTILE LAYER (Optional)

### CAPPING LAYER

If required, depending on sub-grade condition.

### SUB-GRADE