




# RonaDeck

## EcoPath Surfacing

**PATHWAYS** - SuDS Compliant\*

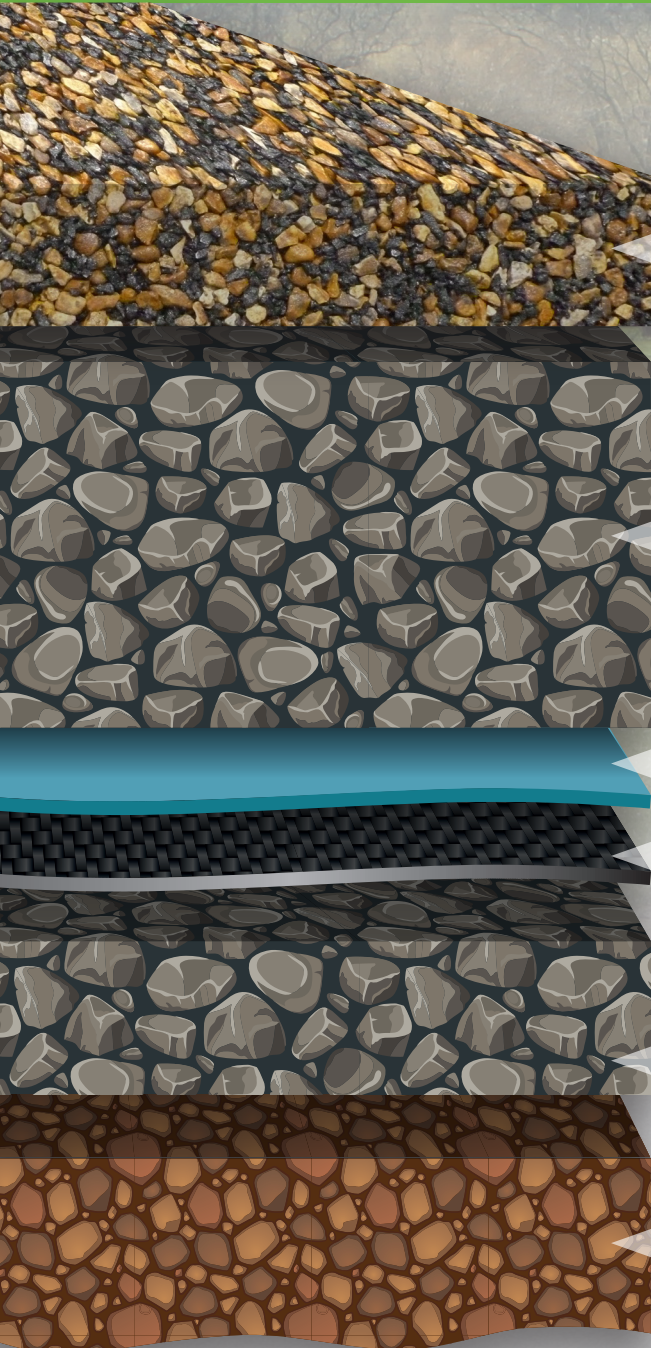

### ECO PATH SURFACING

**35mm** minimum depth of RonaDeck EcoPath UV vulcanised rubber granules and natural aggregate bound with RonaDeck EcoPath UV Resin.

### GRANULAR SUB-BASE

**100mm** minimum well compacted Type 3 granular sub-base or similar approved – depth dependent on site drainage conditions.

### IMPERMEABLE MEMBRANE (Optional)

Impermeable membrane to carry water to infiltration/storage system or soakaway when drainage is poor

**OR**

### GEOTEXTILE LAYER (Optional)

### CAPPING LAYER

If required, depending on sub-grade condition.

### SUB-GRADE

Ronacrete, Ronac House, Flex Meadow, Harlow, Essex CM19 5TD UK  
Tel: +44 (0) 1279 638700 E-mail: [tech@ronacrete.co.uk](mailto:tech@ronacrete.co.uk)

\*Please refer to the technical data sheet on the Ronacrete website before using or specifying Ronacrete products.

